


# intelligent design™ surface applied

## ADA compliant dome geometry

Tile geometry allows for consistent dome spacing to be maintained between adjoining tiles.

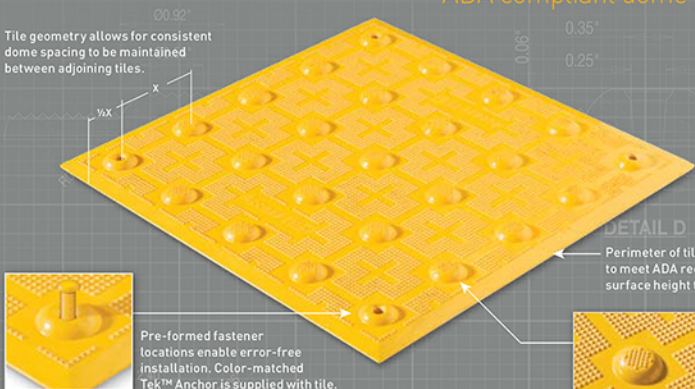

Pre-formed fastener locations enable error-free installation. Color-matched Tek™ Anchor is supplied with tile.



### DETAIL D

Perimeter of tile is designed to meet ADA requirements for surface height transition.




High density, diamond grip™ pyramid micro texture designed for exceptional slip resistance in wet and dry conditions.



Audible detectability technology engineered for sound amplification.

12.00"  
Maximized strength load transfer design, bosses located directly under domes transfer loads directly to substrate.

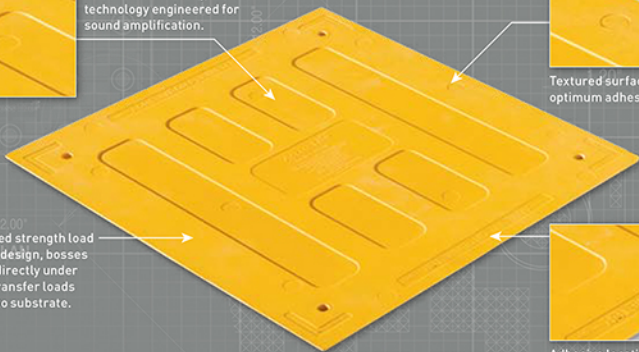

Textured surface to allow optimum adhesive bond.



Adhesive location identified on reverse side of tile for easy, error-free installation.



easy to install, easy to replace  
designed for more environmentally-conscious  
installation and replacement