





Tile geometry allows for consistent dome spacing to be maintained between adjoining tiles.



High density, diamond grip™ pyramid micro texture designed for exceptional slip resistance in wet and dry conditions.

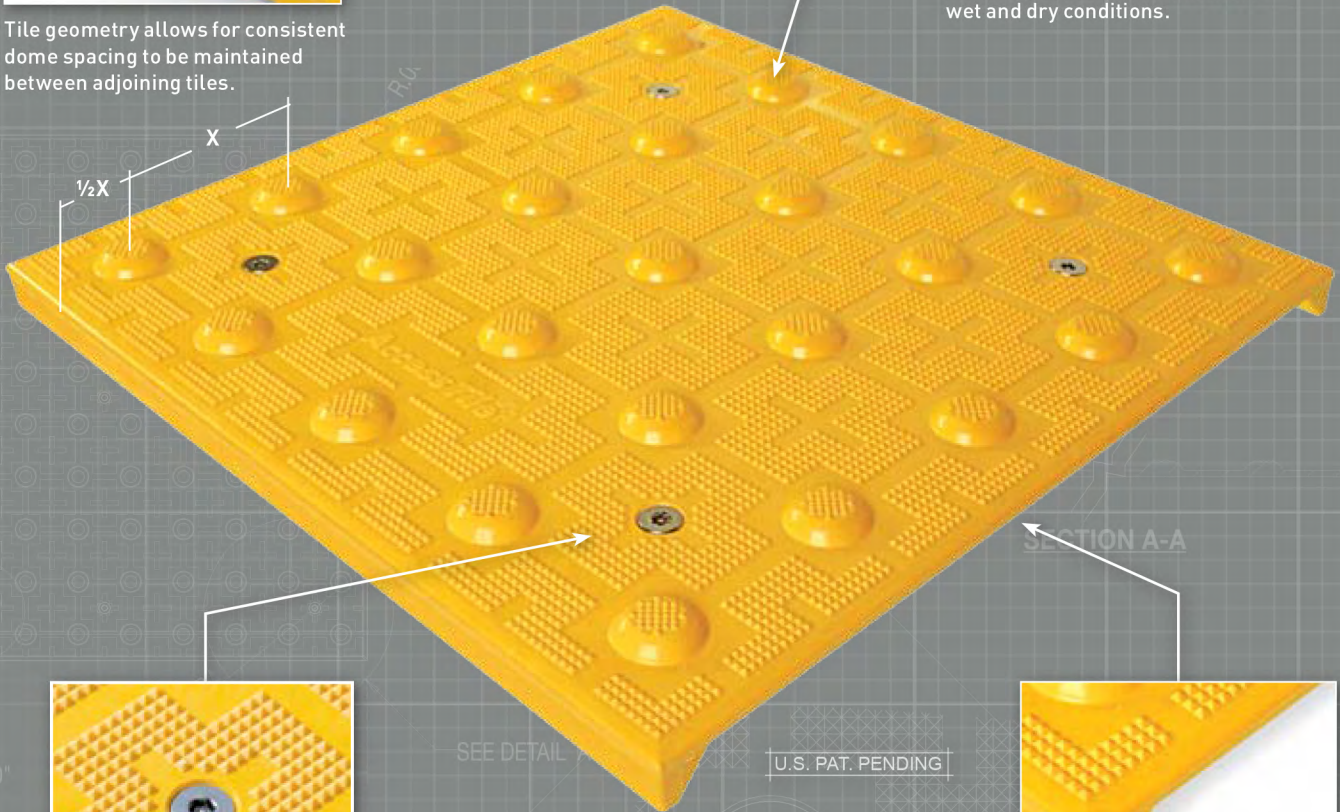

$\frac{1}{2}X$
X



Tamper-proof, countersunk, stainless steel fastener sets flush with tile surface and provides for future replaceability.



Open end design eliminates air entrapment during installation to ensure full interface with concrete substructure.

36.00"

PLAN

SEE DETAIL


U.S. PAT. PENDING



intelligent design™ cast in place replaceable ADA compliant dome geometry



Nylon composite, corrosion resistant anchor and stainless steel fastener provide unlimited re-installation due to self-threading design.

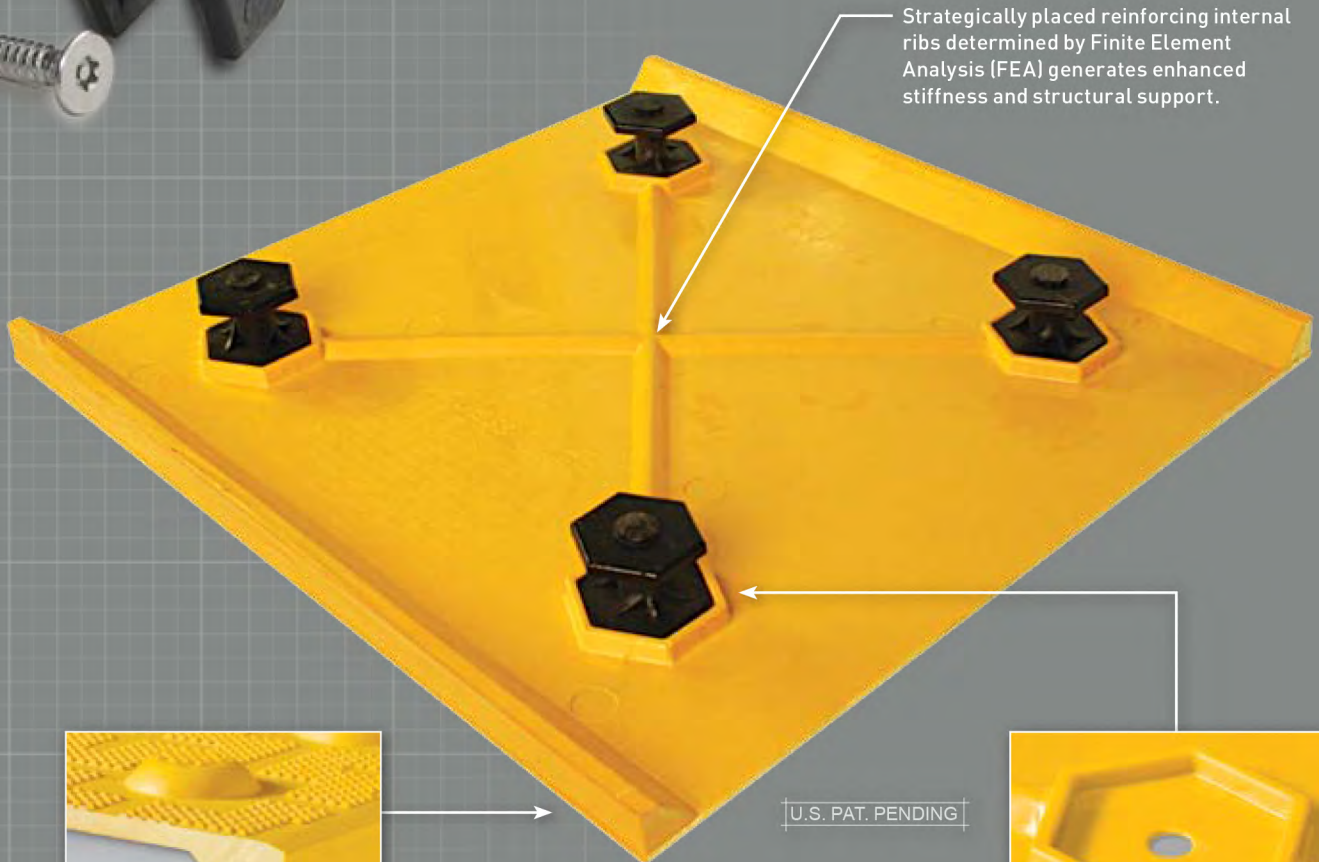

Strategically placed reinforcing internal ribs determined by Finite Element Analysis (FEA) generates enhanced stiffness and structural support.



Reinforced top and bottom flange determined by Finite Element Analysis (FEA) generates enhanced stiffness and structural support.

U.S. PAT. PENDING



Hexagonal molded forms for permanent interface between tile and anchor system. Fastener/anchor system comes pre-assembled.

easy to install, easy to replace
designed for more environmentally-conscious
installation and replacement